


Altus 40 RTS is compatible with the RTS Somfy range of control units and automated control systems.


Thus, it is possible to improve an installation as needed by adding new functionalities.

Remote control for a single product

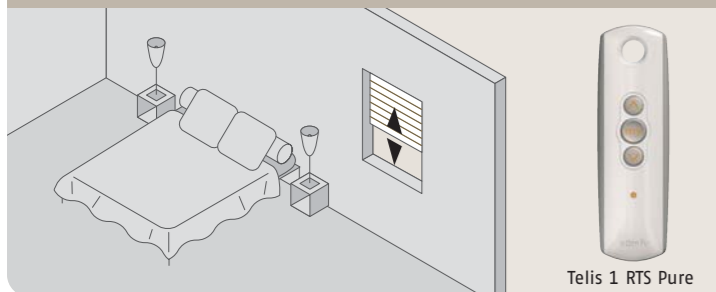

Telis 1 RTS Pure


Control up to 4 different products (blinds, roller shutters, home cinema screen)

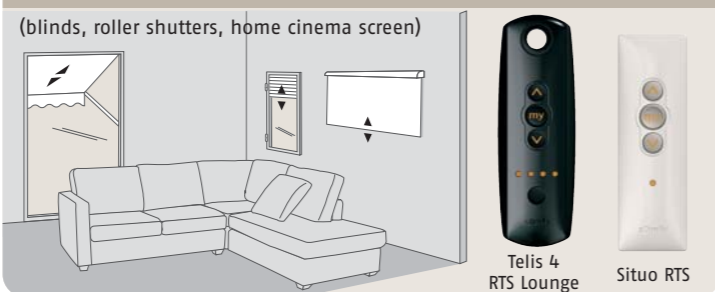

Telis 4 RTS Lounge

Situo RTS


Program one or several products

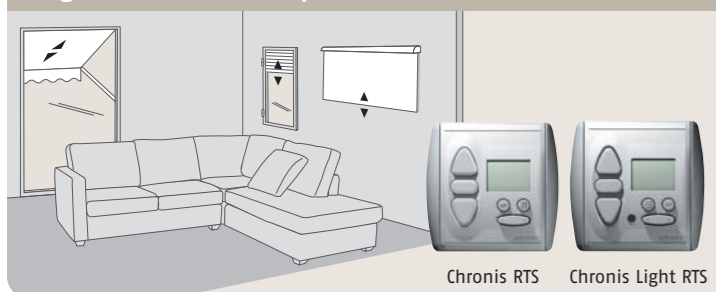

Chronis RTS

Chronis Light RTS

Protect one or several blinds from the wind

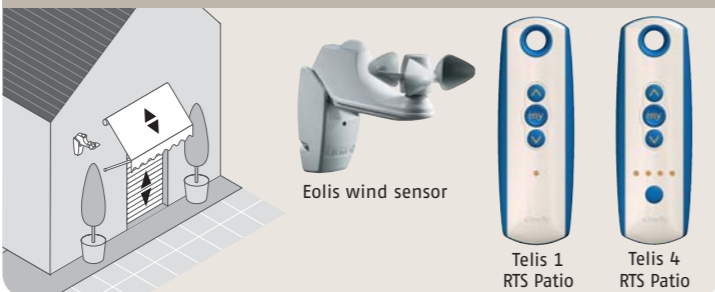


Eolis wind sensor

Telis 1 RTS Patio

Telis 4 RTS Patio

Automatically adjust awnings/blinds pending sun or wind

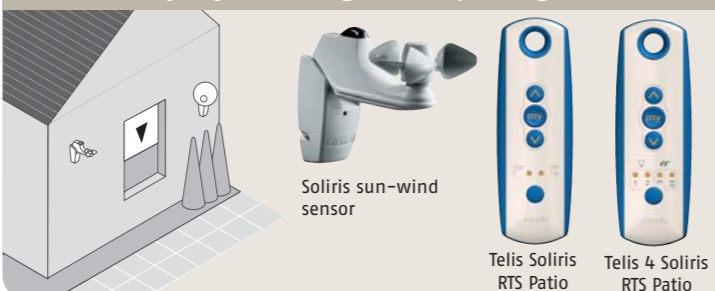

Soliris sun-wind sensor

Telis Soliris RTS Patio

Telis 4 Soliris RTS Patio

my My programming the favourite position

Memorise the favourite position for each customer eg blind lowered halfway, slats open for a roller shutter...a simplified user manual allows the user to adjust the setting as desired.




somfy.com.au



SOMFY Pty Limited
Unit 9 / 38 - 46 South St
Rydalmere NSW 2116
Australia
Toll Free 1800 076 639
T + 61 2 9638 0744
F + 61 2 9638 0075
E somfy@somfy.com.au

somfy

© Somfy Pty Limited 2006



Altus 40 RTS

The new dimension of Radio Technology Somfy™



HOME MOTION BY

somfy

Altus 40 RTS

All the advantages of Radio Technology Somfy™ – now in 40mm diameter.

Somfy's Altus 40 RTS motor is the new multi-purpose motor that may be integrated into all types of compact rolling products including:

- Interior and exterior blinds
- Roller shutters
- Projection screens
- Sunscreens

Altus 40 RTS enhances Somfy's range of radio solutions and now enables you to offer a complete radio solution for all products of small dimensions.



A multi-purpose solution designed for any compact rolling product



Simplicity of integration, ease of installation

Altus 40 RTS benefits from the same design as the Altus 50 and Altus 60 RTS motors. Altus 40 RTS does not change your way of working relative to the LS 40 motor. The mechanical interfaces are identical and belong to the widest range on the market.

And with the simplicity and functionality of the Radio Technology Somfy™, adjustments are easily made: choice of rotation direction, lower limits and programming of the radio receptor following a simplified procedure that is common to all RTS motors. These adjustments are made as desired starting from either the upper point or lower point. Any on site adjustments required are easily made via the RTS control.

More comfort for your customers



The compatibility with the range of RTS Somfy controls and automated systems allows you to extend your offer and, at any time, to easily improve an installation by proposing new functionalities.

Radio Technology Somfy™

Reliable The narrow bandwidth is less susceptible to interference.

Secure Automatic rolling code with 16 million combinations.

Simple Easy and economical to install, without electrical cabling.

Powerful Range of 200 m in open space or 20 m through two reinforced concrete walls.

Guaranteed Perfected and tested by Somfy, the world leader in domestic automated control systems.

Popular More than 1.5 million systems already installed worldwide.

Altus 40 RTS completes the Somfy RTS motor range

Internal blind

Sunscreen

Home cinema screen

Renovation roller shutter

Tunnel or timber box

ALTUS 40 RTS

Setting the end limits from the transmitter
select the upper then lower limit or vice versa and validate settings

scale 1:1 (cm)



ALTUS 40 RTS THE SMALLEST MULTI-PURPOSE RADIO MOTOR

Greater precision
The consistency of the adjustments is ensured by a precise degree of coding.


Greater simplicity of installation
The double insulation (class 2) makes earthing unnecessary, especially for renovation work. Cabling is limited to providing power for a single motor.

Excellent reception capacity
The antenna, completely integrated, also contributes to the compactness of the motor.

| TECHNICAL INFORMATION - ALTUS 40 RTS RANGE | | | | | | |
|---|-------------------|-------------|-------------|-------------|-----------|-----------|
| References | Name | Torque (Nm) | Speed (rpm) | Length (mm) | Power (V) | Power (W) |
| 1020056 | Altus 40 RTS 3/30 | 3 | 30 | 510 | 230 / 240 | 80 |
| 1021144 | Altus 40 RTS 4/14 | 4 | 14 | 470 | 230 / 240 | 65 |
| 1023117 | Altus 40 RTS 9/14 | 9 | 14 | 510 | 230 / 240 | 100 |
| 1024074 | Altus 40 RTS 13/8 | 13 | 8 | 510 | 230 / 240 | 95 |
| TECHNICAL INFORMATION - ALTUS 40 RTS RANGE WITH MOLEX CABLE | | | | | | |
| 1020068 | Altus 40 RTS 3/30 | 3 | 30 | 510 | 230 / 240 | 80 |
| 1021186 | Altus 40 RTS 4/14 | 4 | 14 | 470 | 230 / 240 | 65 |
| 1023142 | Altus 40 RTS 9/14 | 9 | 14 | 510 | 230 / 240 | 100 |
| 1024097 | Altus 40 RTS 13/8 | 13 | 8 | 510 | 230 / 240 | 95 |

| TECHNICAL INFORMATION - LS 40 RANGE | | | | | |
|-------------------------------------|-------------|-------------|-------------|-----------|-----------|
| Name | Torque (Nm) | Speed (rpm) | Length (mm) | Power (V) | Power (W) |
| Lyra | 1.3 | 55 | 458 | 230 / 240 | 70 |
| Mercure | 3 | 30 | 458 | 230 / 240 | 80 |
| Aries Short | 4 | 14 | 414 | 230 / 240 | 65 |
| Mars | 9 | 14 | 458 | 230 / 240 | 100 |
| Vulcan | 13 | 8 | 470 | 230 / 240 | 95 |

More natural light
Thanks to integration in a housing of only 125 mm.



Longer life
The motor is self-protective: it stops when the crown doesn't turn anymore.

5 year Warranty

Somfy offers a 5 - year warranty on all Somfy motors and electronics.